


Screen Views



Sub-menu Screen
Select feature by scrolling.



Screen Lock



Press the Touchscreen icon on the menu to turn the functionality ON/OFF



Connection



The LED 100 C should only be used between -10°C and 40°C. Only charge between 0°C and 40°C.

USB-C socket for charge and firmware update.

USB-C Charger

We recommend to use the original Elinchrom 100W USB Charger to recharge the built-in Li-Ion battery.

Recharging time: 85 min. to 100%

Battery remaining time min/ max power per 100% charged battery:
7h30 / 0h35 at 2700°K
7h20 / 0h40 at 6500°K

Reset To Default Settings

Go to menu, select "i" icon (info), press "Factory Reset", and confirm to reset to factory settings



www.elinchrom.com



Elinchrom is a registered trademark of ELINCHROM LTD, ECHANDENS, SWITZERLAND

01.2025 - QSG LED 100 C - 73337

Route de la Venoge 20, 1026 - Echandens, Switzerland
Tel.: +41(0)216372677
E-mail: support@elinchrom.ch

 elinchrom®


LED 100 C



**Quick
Start Guide**

Setup Menu

To access the menu press on the central button

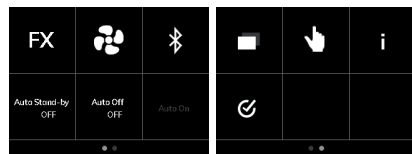

FX Special effects
Swipe to choose the special effect

Fan Switch on/off limits to 20% in CCT and to 50% in RGB

Bluetooth Switch on/off

Auto Stand-by Change duration or switch off

Auto Off Change duration or switch off


Auto On Switch on/off

Background Switch to black or white

Touchscreen Switch on/off

Info

Certifications Show certifications



Auto Stand-by Change duration or switch off

Auto Off Change duration or switch off


Auto On Switch on/off Automatically turn ON the unit when USB power is connected

Auto Stand-by	OFF / 15min / 30min / 45min / 60min
Auto Off	OFF / 15min / 30min / 45min / 60min
Auto On	ON / OFF

Info	Friendly name	Elinchrom LED 100 C, can be changed with the computer or smartphone app.
	Firmware rev.	x.x
	Life time	In hours (hh:mm)
	Power-on count	How many times the units has been turned on
	Factory Reset button	Reset to factory settings
	How to update button	Show QR code, scan with smartphone

FX	CCT intensity Loop
	Intensity Loop
	Paparazzi
	Lighting
	TV
	Candle
	Strobe
	Explosion
	Faculty Bulb
	Welding
	HUE intensity Loop
	Fire
	Cop Car
	Colors Chase
Party Lights	
Fireworks	

Control panel / Touch Screen

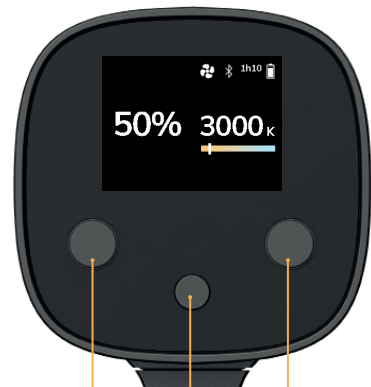

Turn wheel left to decrease or right to increase power
Press to turn the light ON/OFF

↻ CW: +1% power / up
↻ CCW: -1% power / down

Press: access to menu
Long pressv: Turn unit ON/OFF

Press to switch between color temperature, color and FX
Turn wheel left to decrease or right to increase color temperature, change color and FX.

Color Temperature:
↻ CW: +100K / up
↻ CCW: -100K / down

Color change:
<70% power
↻ CW: +10° / up ↻ CCW: -10° / down
>70% power
↻ CW: +1° / up ↻ CCW: -1° / down

Display panel – Dashboard

1. Fan on/off
2. Bluetooth on/off
3. Battery duration
4. Battery status
5. Color temperature
6. Power value
7. Color
8. Special effect

